


Technical specification/ Data sheet

LAN cable Y/CAT6 FTP Out/S

Sheath Printing	It will be printed as customer's requirement with batch produce.			
Customer reference				
Category	CAT6 FTP OUT			
Test Standard	ISO/IEC11801、TIA- 568-C.2 YD/T 1019			
Conductor	Material	Solid Bare copper		
	Nom.O.D.(mm)	0.565	up	+0.005
			down	-0.005
Insulation	Material	HDPE		
	Diameter	1.09±0.03 mm		
Screening Material	Mylar+ AL/Mylar			
Sheath	Thickness	0.60±0.05mm		
	External O.D.	7.4±0.4 mm		
	Surface	Clean,Frapp,Satiation		
	Material	LDPE (complies RoHS)		
	Color	Black		
Surface Printing	Letter height	3.0±0.3mm		
	Color	White		
	Print error & Space	≤±0.5%, 1m		
Core Color	1 White- Blue /Blue	2 White-Orange /Orange		
	3 White- Green /Green	4 White- Brown /Brown		
Packing	---			
Wooden Tray dimension	---			
Packing length	305±1.5m			
Rip-cord	Yes	Drain wire	Yes	
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥10.0		
	Elongation(%)	≥350		
	Aging Period (°C×hrs)	100°C×24h×10d		
	After Aging Elongation(%)	≥300		
	Cold bend(-20±2°C×4h)	8×Cable O.D., No visible cracks		
Electrical Characteristics (20°C)	Delay Shew (ns/100m)	≤45		
	Velocity of Propagation (%)	68		
	unbalanced-to-ground capacitance (pf/100m)	max 330		
	DC Resistance (Ω/100m) max	9.38		
	DC Conductor Resistance Unbalance (%) max	5.0		

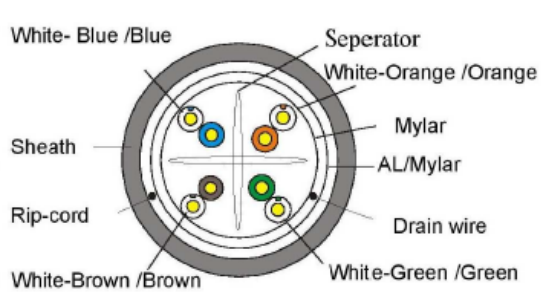

Technical Performance (100m):				
Frequency (MHz)	RL ≥dB	ATT(20°C) ≤dB	NEXT ≥dB	PHASE DELAY ≤ns
1	20.0	2.03	74.3	570.00
4.0	23.0	3.78	65.3	552.00
8.0	24.5	5.32	60.8	546.73
10.0	25.0	5.95	59.3	545.38
16.0	25.0	7.55	56.2	543.00
20.0	25.0	8.47	54.8	542.05
25.0	24.3	9.51	53.3	541.20
31.25	23.6	10.67	51.9	540.44
62.5	21.5	15.38	47.7	538.55
100	20.1	19.80	44.3	537.60
200	18.0	28.98	39.8	536.54
250	17.3	32.85	38.3	536.27

Frequency (MHz)	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB
1	72.3	67.8	64.8
4	63.3	55.8	52.8
8	58.8	49.7	46.7
10	57.3	47.8	44.8
16	54.2	43.7	40.7
20	52.8	41.8	38.8
25	51.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8